

Release Notes for DrayTek Vigor2862 series (UK/Ireland)

Firmware Version	3.8.5_BT (Formal Release)
Release Type	Initial Release
Build Date	12 th May 2017
Release Date	12 th October 2017
Revision	65164
Applicable Models	Vigor2862, Vigor2862n, Vigor2862ac
VDSL Modem Code	779517
ADSL Modem Code	773F01
Locale	UK & Ireland Only

New Features

(None)

Improvements

(None)


Firmware File Types

The ZIP file contains the firmware with two different file extensions, .ALL and .RST. The firmware is identical but the RST file contains factory default settings. If you install the ALL file, your router will retain all existing settings. If you use the RST file, all settings will be wiped from your router.

Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the router's system maintenance menu.

To upgrade firmware, select '*firmware upgrade*' from the router's system maintenance menu and select the correct file. Ensure that you select the ALL file unless you want to wipe out your router's settings back to factory default.

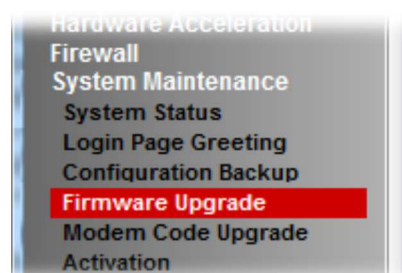

Manual Upgrade

If you cannot access the router's menu, you can put the router into 'TFTP' mode by holding the RESET whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by all LEDs flashing. This mode will also be automatically enabled by the router if there is a firmware/settings abnormality. Upgrading from the web interface is easier and recommended – this manual mode is only needed if the web interface is inaccessible.

[END OF FILE]